



VISORS


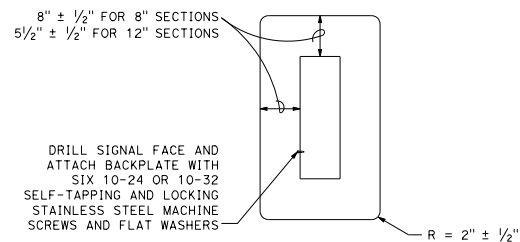


8" AND 12" SECTIONS



BACKPLATE



ISOMETRIC VIEW




ISOMETRIC VIEW



DIRECTIONAL LOUVER


Directional louvers shall be oriented and secured in place with one plated brass machine screw and nut.

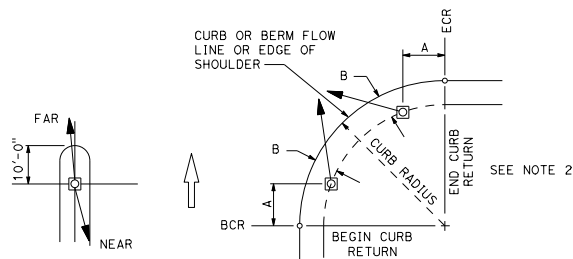

NOTES:

1. Typical signal pole placement unless dimensioned on plans.
2. For A and B dimensions, see Pole Schedule.

SIGNAL STANDARD PLACEMENT DIMENSIONS AND EQUIPMENT LOCATIONS

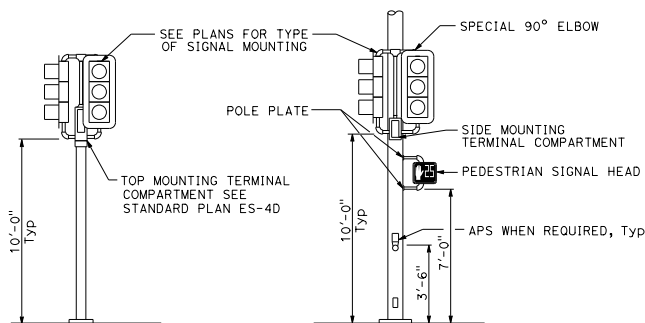


TOP MOUNTED SIGNALS (TV)

Type 1-A, 1-B, 1-C and 1-D standard as indicated on the plans




SIDE MOUNTED SIGNALS (SV AND SP)

Normally used on standards with luminaire or signal mast arm



LEFT TURN LANE SIGNAL

Type 1-A, 1-B, 1-C and 1-D standard as indicated on plans



SIGNAL FACES

STATE OF CALIFORNIA
DEPARTMENT OF TRANSPORTATION

**ELECTRICAL SYSTEMS
(SIGNAL HEADS
AND MOUNTINGS)**

NO SCALE

ES-4C